

DATASHEET



SMPS(Switch Mode Power Supply)

A-426, Road No.: 28, Wagle MIDC,
Wagle Estate,Thane-400604,
Maharashtra, INDIA.
MOB:+91- 80977 07496 | +91-72085 60460
Email: info@powertronindia.com
Web: www.powertronindia.com

PIPL-600W Series

600W SMPS

❖ FEATURES :

- Wide input supply range.
- Built in EMI filter, low ripple noise.
- Protection: Short circuit / Over load / Over voltage.
- 100% Full Load Burn in test.
- High efficiency, long life and high reliability.
- Miniature size.



❖ SPECIFICATION:

MODEL NO	PIPL-1250AD	PIPL-1540AD	PIPL-2425AD	PIPL-3617AD	PIPL-4813AD	
OUTPUT	DC VOLTAGE	12V	15V	24V	36V	48V
	RATED CURRENT	50A	40A	25A	17A	12.5A
	CURRENT RANGE	0 - 50A	0 - 40A	0 - 25A	0 - 17A	0 - 12.5A
	RATED POWER	600W	600W	600W	600W	600W
	RIPPLE & NOISE (max)	<1%Of Rated Voltage				
	VOLTAGE ADJ.RANGE	Fixed Type				
	VOLTAGE TOLERANCE	Rated Voltage Of +/-1%				
INPUT	LINE REGULATION	<+/-0.5%				
	LOAD REGULATION	<+/-0.5%				
	VOLTAGE RANGE	180V TO 265VAC				
	FREQUENCY RANGE	50Hz				
PROTECTION	EFFICIENCY	>85%				
	OVERLOAD	Above 105%Rated Output Power Protection Type:ConstantCurrent,Recoversautomaticallyafterfaultconditionisremoved				
	OVER VOLTAGE	125%-150% Rated Output Voltage Protection type: Hiccup Mode ,Recovers automatically after fault condition removed				
INDICATION	LED	INPUT_OK OUTPUT_OK				
	ENVIRONMENT	WORKING TEMP.	(-5DegC To 55DegC.)			
WORKING HUMIDITY		20 To 90% RH Non Condensing.				
STORAGE TEMP./ HUMIDITY		(-10 To 85DegC 10 To 95%RH)				
VIBRATION		(-10 To 500 Hz,2G,20min/Sweep,Period-1Hr,Each along X,Y,Z axes.				
SAFETY & EMC	SAFETY STANDARD	Designed To Meet UL60950-1				
	WITH STAND VOLTAGE	I/P-O/P:2KVDC,I/P-Earth:2KVDC				
	ISOLATION RESISTANCE	I/P-O/P,I/P-Earth, O/P-Earth:100MOhms/500VDC.				
	EMI & EMC	Designed To Meet EN55022,EN61000-4-2.				
OTHERS	ENCLOSURE PROTECTION	IP-20				
	COOLING	Forced cooling				
	DIMENSION (L*W*H)	220*200*105mm(L*W*H)				
	WEIGHT	2.8Kg				
NOTE	1.All parameters NOT specially mentioned are measured at typical input ,rated load and 25 Deg.c.ambient temperature. 2.Ripple & noise are measured at 20MHz of bandwidth by using a12"twisted pair-wired terminated with a0.1uF&47uF parallel capacitor. 3.Tolerance includes set up tolerance, line regulation and load regulation. 4.The power supply is considered a component which will be installed into final equipment .The final equipment must be recon formed that it still meets EMC directives. 5.Specifications are subject to change with out prior notice due to constant improvement in design& technology.					




SMPS IDC DC Converters | Adapters | Electro Plating Rectifier | POE SMPS | Battery chargers | DC AC Converter
DC Regulator Power supply | LED Driver | Inverter | CVT | Servo controlled Voltage Stabilizer | Transformer

SMPS(Switch Mode Power Supply)

PIPL-600W Series

A-426, Road No.: 28, Wagle MIDC,
Wagle Estate, Thane-400604,
Maharashtra, INDIA.
MOB:+91- 80977 07496 | +91-72085 60460
Email: info@powertronindia.com
Web: www.powertronindia.com

▪ Mechanical Specification

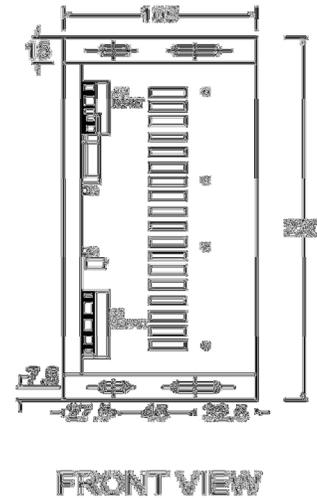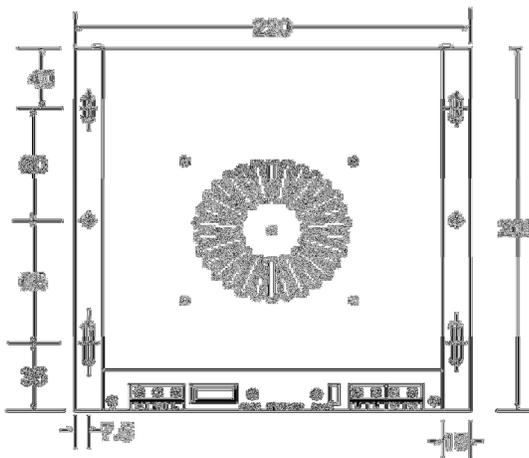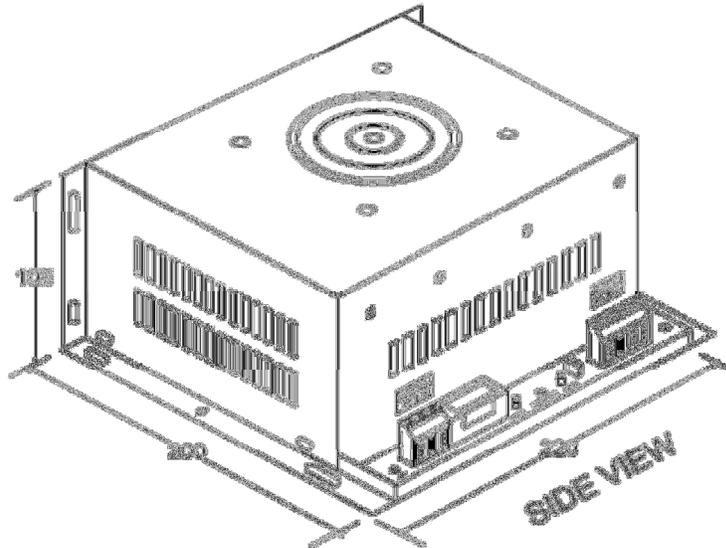

Dimension (mm) – 220*200*105